



JK part numbers: Page 1 of 3

J13005

OEM part number:


Not applicable

# Tech Sheet


This product is suitable for:  
Type 25 models 1979 to 1992

## T25 Rear seat Belts

1. A fitted rear seat belt.

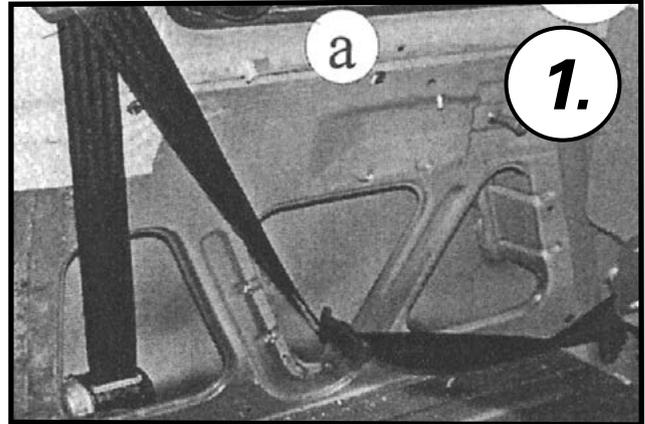

2. Remove your rear boot panel and any other obstruction such as bedding. Locate your top seat belt mounting point (A). Carefully cut the headliner to reveal the mounting point. Please note, if you have a converted panel van, you may have to weld in new mounting points. J11998

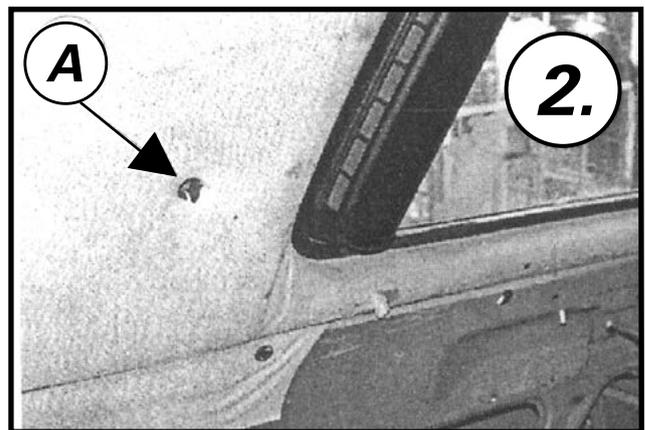

3. To fasten the top seat belt mounting point, place the bolt through the triangle bracket. Place a stepped washer onto the other end of the bolt then a flat washer as per the picture.



[www.justkampers.com](http://www.justkampers.com)  
0345 1204582

Just Kampers, Unit 1 Stapeley Manor, Long Lane, Odiham, Hants. RG29 1JE

NB. Please note that whilst every attempt is made to ensure that these instructions are as accurate and clear as possible, we cannot be held responsible for misinterpretation of these instructions or for any subsequent accident or damage caused through mis-fitted parts.



JK part numbers: Page 2 of 3

J13005


OEM part number:

Not applicable



# Tech Sheet

*This product is suitable for:  
Type 25 models 1979 to 1992*

**4.. Tighten making sure the bracket can pivot.**

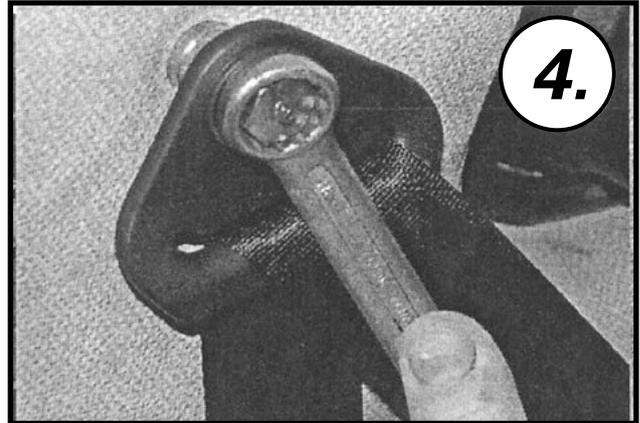

**5. Fit the reel on the inside panel, pushing the bolt through the fixing hole first. Then add one flat washer and the seat belt reel and fasten together using the nut provided. You will notice the actual belt is twisted and requires untwisting as in picture 6.**

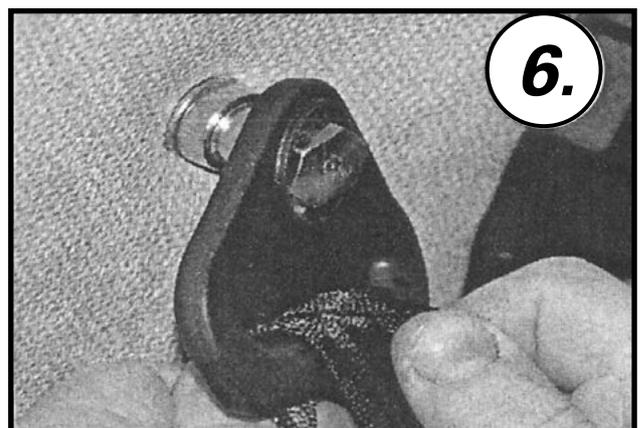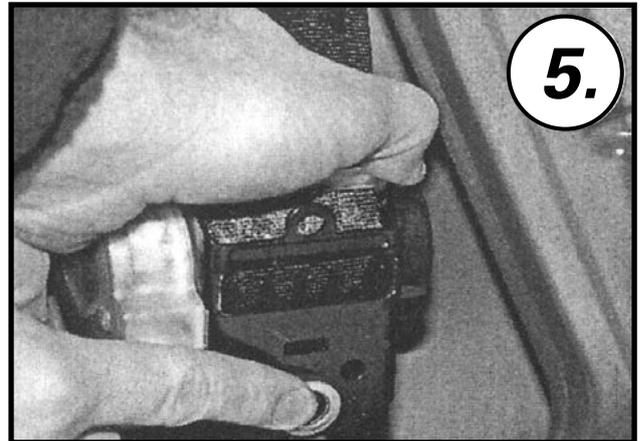



**JK part numbers: Page 3 of 3**

**J13005**


**OEM part number:**

**Not applicable**

# Tech Sheet

**This product is suitable for:  
Type 25 models 1979 to 1992**

**7. Locate the bottom seat belt mounting point, down the side of your bed (B). Using a bolt, fasten the bracket to the panel.**

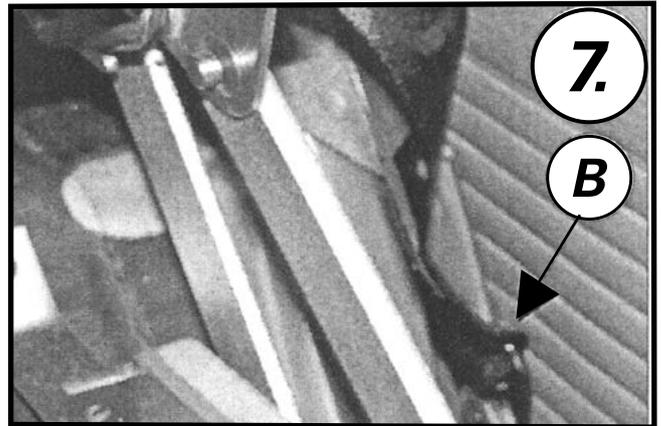

**8. Now fasten the provided seat belt buckle to the mounting point found under your bed. This should be roughly in the centre of the van.**

