

DUAL CHARGING RELAY


FITS ALL 12V VEHICLES

JK Part Number: J10520

NOTE: Before installing your gauge, disconnect your earth terminal from your battery so that you do not create any short circuits which may result in fire.

FITTING GUIDE

1. Run a wire from the live terminal of your vehicle's primary battery to terminal 30 on the relay.
2. Run a wire from terminal 87 on the relay to the live terminal of your secondary or leisure battery.
3. Run a wire from terminal 85 on the relay to an earthed part of the vehicle.
4. Run a switched 12v live supply to terminal 86 on the relay - this will stop the primary battery discharging itself into the secondary battery.
5. Mount the relay in a suitable position.
6. Reconnect your battery.

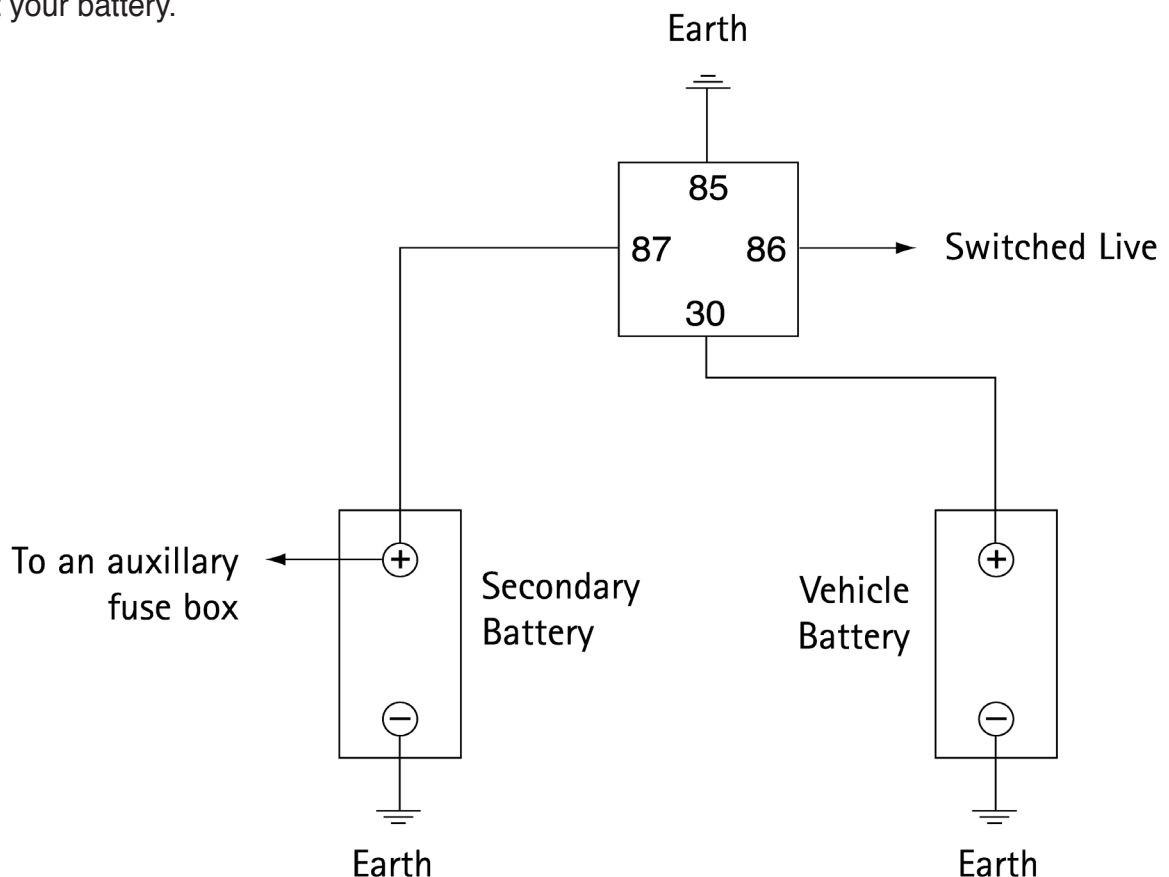

N.B. Whilst every attempt is made to ensure that these instructions are as accurate and clear as possible, we cannot be held responsible for misinterpretation of these instructions or for any subsequent accident or damage caused through mis-fitted parts.